


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009  
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
1K	2	A	ISSUED	15-Oct-09	JG	JS
-	-	-	-	-	-	-
-	-	-	-	-	-	-

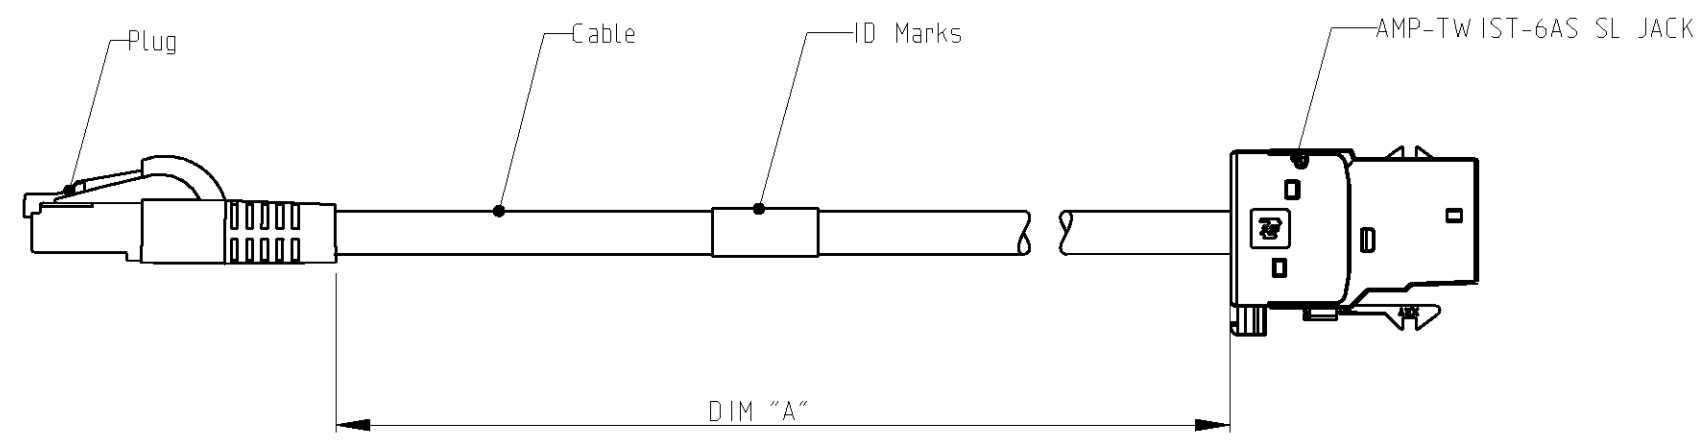

SCHEMATIC VIEW

1. Class Ea CONSOLIDATION POINT CABLE ASSEMBLIES ARE USED TO EXTEND THE HORIZONTAL CABLING FROM THE CONSOLIDATION OR TRANSITION POINT TO THE TELECOMMUNICATIONS OUTLET, ACCORDING TO ISO/IEC 11801.
2. FOR AVAILABLE DASH LENGTHS, DIM A, SEE THE TYCO ELECTRONICS CATALOG.

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN J.GATNAU 15-Oct-09 CHK M.MAQUEDA 15-Oct-09 APVD J.SANABRA 15-Oct-09	Tyco Electronics AMP España, S.A. Barcelona, Spain.
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC 108-93029 APPLICATION SPEC - WEIGHT -	NAME CONS. POINT AMP-TWIST 6AS / RJ45 W/O DUST COVER Class Ea F/FTP LSZH SOLID WHITE
MATERIAL -	FINISH -	SIZE A3	CAGE CODE - DRAWING NO ©=1711825 RESTRICTED TO -
CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1 REV A